


Specifications

1. Number of Phase	2
2. Step Angle	1.8°
3. Rated Voltage	3.0V DC
4. Rated Current	6.0 Amp
5. Holding Torque	2.75 N.m Min.(Two phase on/rated current)
6. Phase Resistance	0.5 ±0.1ohm(20°C)
7. Phase Inductance	2.2 mH±20%(1kHz 1V rms)
8. Rotor Inertia	750g.cm <sup>2</sup>
9. Motor Weight	1.5kg
10. Insulation Class	B(130°C)

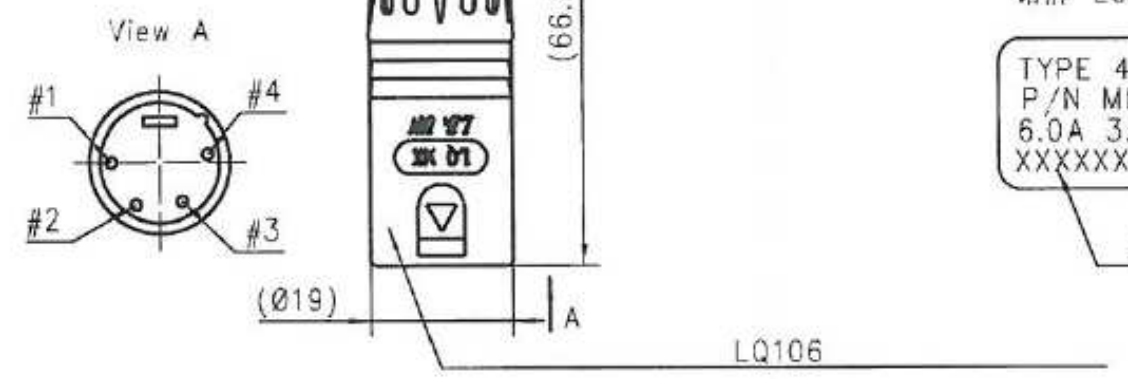

Part Number: **MP-2303**      Part Description: **NEMA 23 3 Stack High Torque Stepper Motor**

Material:      Color:

Tolerance: X.XX ± 0.010      Finish:      Author:

X.XXX ± 0.005      Date: **2013.10.24**      Units: **mm**

X.XXXX ± 0.001      Revision: **A**      Scale: **None**      Sheet: **1 OF 1**

BEND ± 1°      (Technical drawing symbols)

444 Lake Cook Road Suite 22, Deerfield, IL 60015  
 Tel. (847) 940.9305 Fax (847) 940.9315  
 www.flashcutcnc.com